

Design of a Modular, Marine Free-Fall Cone Penetrometer

A Time and Cost-Effective Device for In-Situ Geotechnical Characterization of Marine Sediments

By Sylvia Stegmann

Research Scientist

Dr. Heinrich Villinger

Professor

and

Dr. Achim Kopf

Professor

German Science Foundation-

Research Centre for Ocean Margins

University of Bremen


Bremen, Germany

Increasing human impact on near-coast areas and toward the continental shelves and slopes requires a profound knowledge of the uppermost seafloor sediments. It is not only nat-


ural disasters (such as storm surges, landslides and tsunamis), but also anthropogenic effects (such as static or dynamic loading of the seafloor by offshore construction) that represent an economical and environmental threat to society. As a consequence, the physical properties of seawater-saturated soils appear to be key parameters in the assessment of sediment stability.

Marine sediments can be considered as a two-phase-system: mineral particles and fluids (water, gas). The second occupies the voids between the first. Pore volume generally decreases with increasing stress onto the sedi-

ment. The lower the pore volume of the sediment, the stronger the cohesion between particles, which translates to higher shear strength. The mechanical behaviour of any sediment is controlled by the equilibrium between the force on the solids (normal stress) and the counteracting pore pressure, which is created by the incompressible, less dense fluids. It has long been known that the mechanical stability of soil is a function of mineralogical strength and excess pore pressures; the latter of which may overbear the normal stress and cohesion, causing failure, liquefaction or hydro-fracture. Soils that are especially clay mineral-

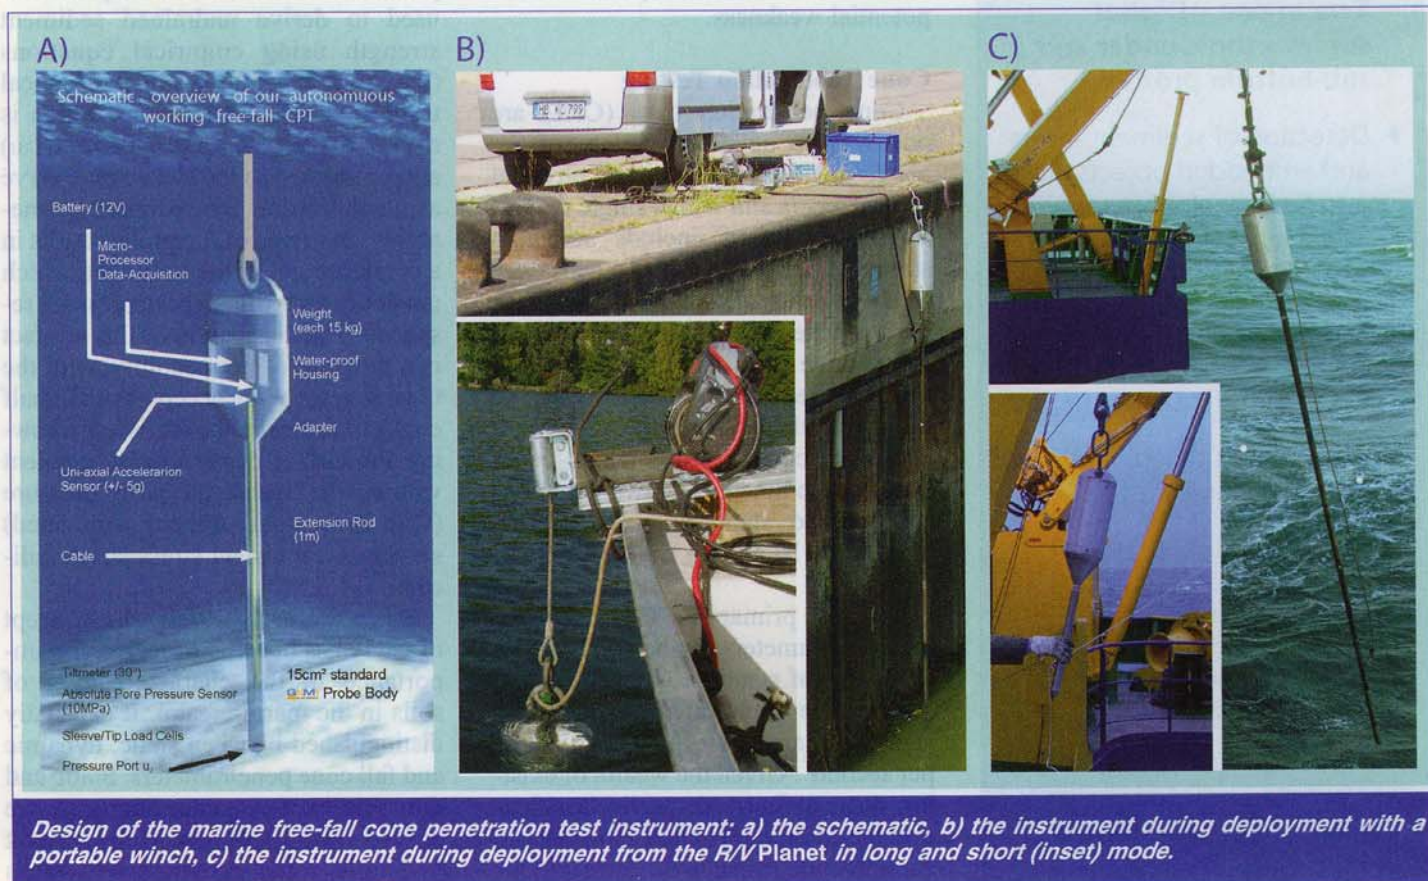

Innomar

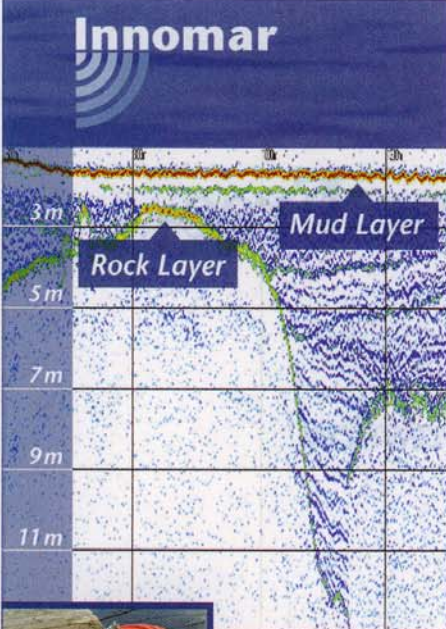

Transducer
22 x 22 x 10 cm
Weight: 25 kg

Main unit
30 x 35 x 40 cm
Weight: 24 kg


SES-2000 compact The mobile SBP for shallow waters

Two in one – Digital
survey echosounder and
sub-bottom profiler:

- ▶ Detection of sediment layers and embedded objects with excellent resolution at frequencies between 5 and 15 kHz.
- ▶ Sediment penetration up to 50 m depending on material, depth and frequency.
- ▶ Water depth determination at high accuracy using 100 kHz.

Innomar Technologie GmbH
Schutower Ringstraße 4
D-18069 Rostock • Germany
Phone +49 (0)381-44079-0

Details at
www.innomar.com

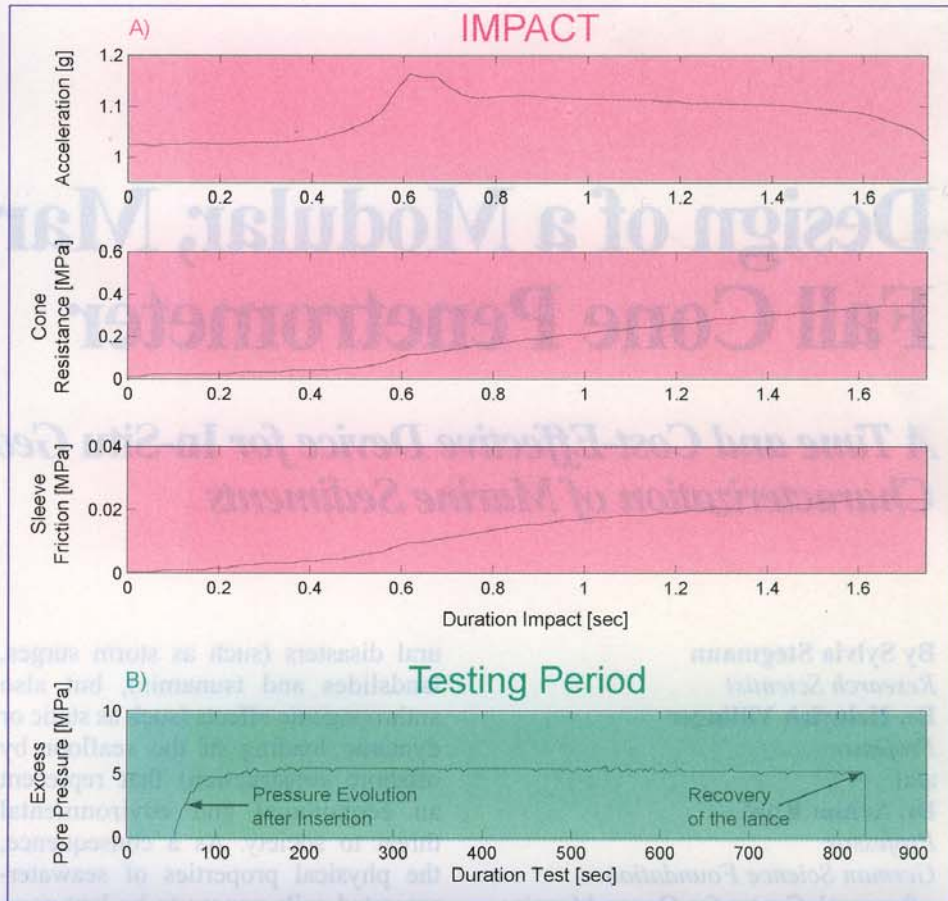

Primary parameters versus time from a test in the North Sea. Excess pore pressure rises to values above five kilopascals shortly after insertion of the instrument, and does not show significant decay over the 15 minutes of testing.

rich in their low intrinsic frictional strength and low permeability represent zones of fluid overpressures and potential weakness.


Cone Penetration Testing

Cone penetration tests (CPT) are one way to collect a variety of the above-mentioned sediments' physical parameters *in situ* with a single device. These parameters include sediment strength (derived from the resistance of the cone and the sleeve of the probe during penetration), pore pressure (in up to three positions: u_1 through u_3), temperature, tilt and deceleration. The heart of the system is a sensor-equipped, conical probe which penetrates the sediment. The two commonly accepted standard sizes for the probes are 10 and 15 square centimetres.

From the primary CPT data set, secondary parameters can be derived. The main aim of standard CPT testing is to profile the penetrated sedimentary succession at a rate of two centimetres per second¹. Given the wealth of existing data, a first-order soil classification based on the friction ratio (sleeve friction/cone resistance), corrected for

pore pressure effects, was established.¹ The frictional resistance of the soil to penetration of the lance may also be used to derive undrained sediment strength using empirical equations (based on laboratory soil mechanical testing).² The pore pressure, which is measured near the tip (u_1), beneath (u_2) and/or above (u_3) the sleeve may serve as an indication for sediment permeability. Insertion of the probe results in a displacement of the sediment, which generates an artificial pore pressure response. The dissipation of this artefact is a measure of permeability, with the t_{50} parameter being accepted as the half decay of the initial peak.³ When allowing for further decay toward ambient values, the measured pore pressure (with hydrostatic pressure subtracted) serves as a transient stress-strain indicator.

Since the early 1970s, the concept of CPTs has become of increasing importance in the characterization of soils in the marine realm. It is usually distinguished between static, dynamic and fall cone penetrometers. Static and dynamic cone penetrometers are pushed in the sediment with constant hydraulic force provided by trucks

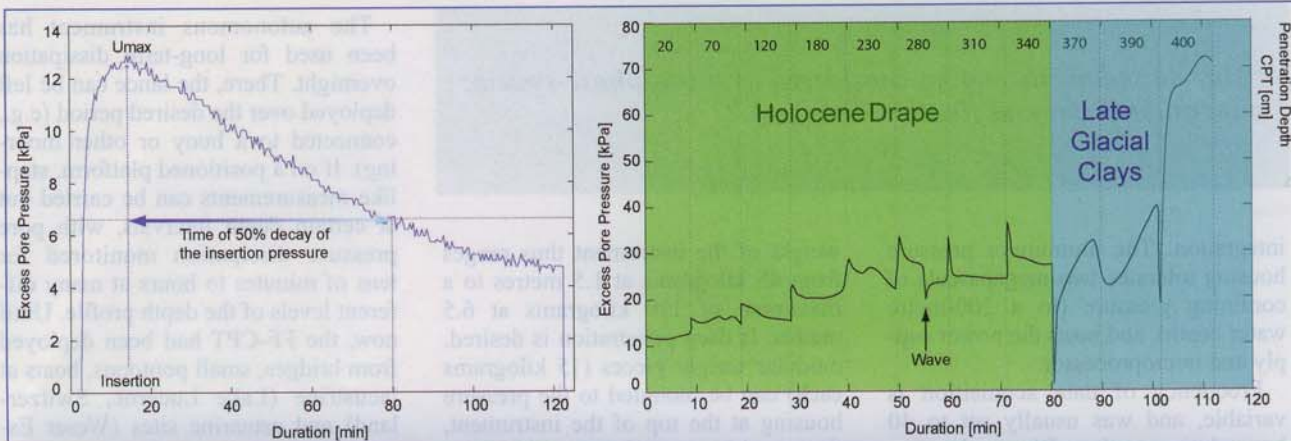

Results from pore pressure dissipation tests in clayey sediments. The left chart shows full penetration and two-hour decay in Wilhelmshaven, Germany. The right chart shows step-wise deployment and 10-minute intervals of pore pressure decay in lacustrine clays in Lake Lucerne, Switzerland.

(onshore) or huge seabed rigs (off-shore). In contrast, the less common fall cone penetrometers are lowered on a cable and penetrate the sediment under their own momentum gained during descent. Despite the disadvantage of generally lower total penetration depths, this article revisits the concept of a free-fall instrument because it provides a more time and cost-efficient investigation of the upper marine soft sediment layers.

Concept and Performance

The newly developed lance is an easy-to-use, lightweight free-fall CPT (FF-CPT) instrument for shallow marine applications (200 metres' water depth). The probe consists of an industrial 15-square-centimetre piezocone and a waterproof housing containing a microprocessor, volatile memory, battery and accelerometer. Strain gauges inside the probe measure the cone resistance and sleeve friction by subtrac-

tion. A single pore pressure port (u_2) is equipped with an absolute 10-megapascal pressure sensor. An inclinometer is used to monitor the penetration angle at $\pm 30^\circ$ relative to vertical, while temperature is monitored via a thermistor. An accelerometer provides information about the descent velocities and deceleration behaviour of the instrument upon penetration. Its data enable the user to calculate penetration depth during multiple deployments by

IMAGE IS EVERYTHING...

Applied Signal Technology, Inc. (formerly Dynamics Technology, Inc.) is transforming underwater imaging with its ground-breaking Synthetic Aperture Sonar (SAS) technology. We offer end-to-end systems for high-resolution, wide-area seafloor mapping, which include PROSAS™ — the only real-time SAS processor fielded on Autonomous Undersea Vehicles (AUV), and MINESCOUT™ — our extensible mission analysis workstation that features custom SAS and sidescan displays, survey post-processing tools, Automatic Target Recognition (ATR), and information management for military and commercial applications. Our systems provide over 25x greater resolution at range with a 300% increase in area coverage compared to conventional sidescan sonars.

Our product line crosses the entire SAS spectrum... from high-frequency mine hunting, survey mapping and harbor security to low-frequency, long-range surveillance.

To give yourself the SAS advantage, visit www.appsig.com or contact SAS@appsig.com.



Applied
Signal
Technology, Inc.



Visit us at booth 913
Oi06, 21-23 March 2006

"Marine sediments can be considered as a two-phase-system: mineral particles and fluids (water, gas)."

integration. The aluminium pressure housing tolerates two megapascals of confining pressure (to a 200-metre water depth), and hosts the power supply and microprocessor.

Frequency of data acquisition is variable, and was usually set to 40 hertz during testing. Binary data are temporarily stored on a micro flash card and then downloaded to a computer. Two battery packs provide performance times of about six and 12 hours, respectively.

The FF-CPT is designed for both pogo-style measurements from moving platforms and mid-term deployments from a crane, winch, anchored vessel or tied to a buoy. The length of the lance varies from 1.5 metres (in short mode) up to a maximum of 6.5 metres (in long mode). The extension is accomplished by adding one-metre-long metal rods and internal extension data/power cables within them. The

weight of the instrument thus ranges from 45 kilograms at 1.5 metres to a maximum of 110 kilograms at 6.5 metres. If deep penetration is desired, modular weight pieces (15 kilograms each) can be mounted to the pressure housing at the top of the instrument, then reaching a maximum of 170 kilograms.

This construction allows for variable testing methods depending on the platform, geological setting and scientific question. The lightweight version can be handled almost effortlessly by an individual. Even the 6.5-metre-long instrument can be deployed from relatively small boats by two people; recovery is facilitated by a portable four by four car winch powered by a battery. However, the easiest way to operate the device is by a regular winch and deep-sea cable on research vessels, either over the side or the A-frame.

The autonomous instrument has been used for long-term dissipation overnight. There, the lance can be left deployed over the desired period (e.g., connected to a buoy or other mooring). If on a positioned platform, step-like measurements can be carried out at certain depth intervals, with pore pressure dissipation monitored for tens of minutes to hours at many different levels of the depth profile. Until now, the FF-CPT had been deployed from bridges, small pontoons, boats at lacustrine (Lake Lucerne, Switzerland) and estuarine sites (Weser Estuary, Germany), and from larger vessels in the North and Baltic seas.

FF-CPT Results

Initial tests have been successfully carried out in muddy, gas-rich to stiff, coarse-grained sediments in lakes, estuaries and on the marine shelf in the North Sea. Depending on the sediment and deployment velocity (winch speeds of 17 centimetres per second⁻¹ to free drop), the penetration depth ranges from half a metre (in fine-grained sand) to five metres (in silty clay). In the fine-grained sands, the mounting of weight pieces results in a 20-centimetre-per-15-kilogram weight

SonarWiz.MAP

- Easy to use, high quality sonar data acquisition and processing software
- Customer support with a response time of less than 24-hours
- Priced for exceptional value

Data acquisition SSS, SBP, magnetometer | Real-time mosaicking | Target analysis | Integrated survey line planner | Report tools | Training

Request a product evaluation at www.chesapeketech.com

“Increasing human impact on near-coast areas and toward the continental shelves and slopes requires a profound knowledge of the uppermost seafloor sediments.”

increase of penetration depth. Pore pressure response was not significantly affected by the additional weight during impact.

In general, the results show similar cone and sleeve resistance and, hence, friction ratios as in standard CPT tests when comparing the sediment grain size analyses with the CPT results. Soil classification following previous charts and studies was found to be applicable at low to moderate winch speeds, while high penetration rates (greater than 80 centimetres per second) and free-drop fail to provide meaningful results. The authors of this article suggest that additional high-velocity testing is required to empirically adjust the classification for the FF-CPT instrument.

Pore pressures generally rise during impact, but often show rapid decays toward ambient values during dissipa-

tion tests. Two different strategies were followed during the longer tests, aimed at pore pressure evolution: full penetration of the probe and dissipation times of several hours, and step-wise depth profiling and arresting the instrument at each level for about 10 minutes. As an example for the first strategy, a two-hour-long dissipation test using mud in Bremerhaven, Germany, is presented. The pore pressure evolution in Bremerhaven is characterized by a build-up soon after insertion (greater than 12 kilopascals), followed by a decay to half that value (t_{50}) after approximately one hour. The second strategy was followed during measurements in glacial and post-glacial clayey sediments of Lake Lucerne.

Interestingly, a different behaviour was observed in the Holocene clays down to 340 centimetres' penetration

depth, and in the late glacial clays underneath. In the hangingwall, pore pressure evolution during each measuring increment is characterized by an initial increase when lowering the instrument followed by a decay in the subsequent 10 minutes. In contrast, the late glacial clays show a significant pore pressure drop when inserting the probe further, which in turn is followed by a continuous rise in pore pressure over the 10-minute period. This change in pore pressure signal is attributed to overpressure in the foot-wall section, most likely due to the presence of gas.

In summary, initial tests have demonstrated that the new FF-CPT instrument represents a flexible, cost-efficient way to carry out *in-situ* geotechnical sediment characterization. Data are in general agreement with standard industry CPT testing, however, the device offers new opportunities for longer term deployments or use from small platforms and boats.

Applications

The FF-CPT is envisaged to be a valuable addition to industry CPT experiments. The lightweight, modular design of the probe makes it a good



DEEPSEA
Power & Light
www.deepsea.com

WE WORK WHERE YOU DO.

LED Multi-SeaCam® 2065

Color video camera

Integrated lighting system

Rugged titanium housing rated to 4000 meters

Photo courtesy of Coast Diving

800-ITS DSPL (800-487-3775)

"The FF-CPT is envisaged to be a valuable addition to industry CPT experiments."

companion when approaching different scientific problems, such as the stability of sediments, the temporal evolution of fluid mud in estuaries and harbors, the collection of *in-situ* geotechnical data for construction and cable laying, the assessment of tidal forcing/resuspension, the liquefaction potential of marine soils and the groundtruthing of geophysical data.

Data indicate that this new FF-CPT represents a time and cost-efficient way for sediment characterization. Modifications to the instrument are straightforward when larger penetration depth, longer deployments or different ranges of sensors are required.

Acknowledgements

The authors would like to acknowledge M. Lange for valuable suggestions and immense help with construction, programming and testing of the FF-CPT. Colleagues V. Berhorst, B. Heesemann and N. Kaul provided valuable discussions. S. Potthoff, F. Anselmetti, M. Strasser and T. Wever shared their time in assisting CPT testing during their campaigns. Funding for this research was provided by the German Science Foundation to the Research Centre for Ocean Margins.

References

For a complete list of references, contact author Sylvia Stegmann at stegmann@uni-bremen.de. /st/

For more information, please visit our website at www.sea-technology.com.

Sylvia Stegmann has developed two cone penetration test free-fall instruments during the course of her Ph.D. thesis. These instruments comprise the shallow-water probe presented in this article and a deep-water instrument (4,000 metres) to extend measurements to the continental slope. Stegmann's research is dedicated to pore pressure measurements in situ and in the laboratory.



Dr. Heinrich Villinger is the head of the marine technology and sensors section at the University of Bremen. He is a geophysicist with a focus on marine heat flow and deep-sea instrumentation. As a member of the Integrated Ocean Drilling Program Scientific Measurement Panel, Villinger has years of experience in cutting-edge downhole tool technology.



Dr. Achim Kopf leads the marine geotechnics section at the Research Centre for Ocean Margins at the University of Bremen. His research objectives include sediment deformation, natural hazards and long-term monitoring of subduction zone processes. Kopf develops equipment for geotechnical laboratory testing and seagoing expeditions and observatories.



MARINE SONIC TECHNOLOGY, Ltd.

Sea Scan® PC Side-Scan Sonar

High & Ultra High Resolution Sonar At A Very Affordable Price



COMET

A wooden steamer that was struck by the Canadian steamer *Manitoba* in 1875. She lies upright at a depth of 230 feet. Image was taken using a MSTL stainless steel 600 kHz

Image Courtesy of the Great Lakes Shipwreck Historical Society.

MSTL
P.O. Box 730
White Marsh, VA 23183
www.marinesonic.com
800.447.4804

